



DZ158-125/DZ158-125H Moulded Case Circuit Breaker

1. General

1.1 Function

protection of circuits against short-circuit currents,
protection of circuits against overload currents,
switch,
isolation,
Suitable for application: 110VDC/Pole

1.2 Selection

Technical data of the network at the point considered:
the earthing systems (TNS, TNC),
short-circuit current at the circuit-breaker installation point,
which must always be less than the breaking capacity of
this device,
Network normal voltage.


1.3 Approvals and certificates

Detailed information, please refer to Certificates Table
on the last page.



2. Technical data

2.1 Curves

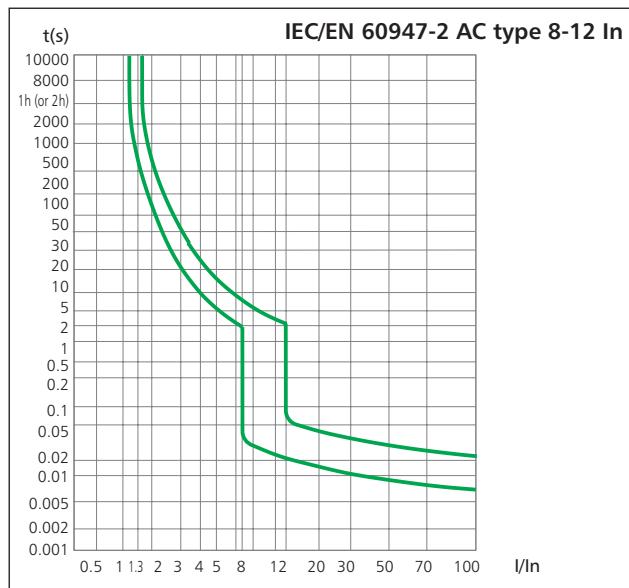

2.2

	Standard	IEC/EN 60947-2	
Electrical features	Rated current I_n	A	63, 80, 100, 125
	Poles		1P, 2P, 3P, 4P
	Rated voltage U_e	V	230/400~240/415
	Insulation voltage U_i	V	500
	Rated frequency	Hz	50
	Rated breaking capacity	kA	6/10(AC), 20KA(DC 60V/125V), 10KA(DC 110V/220V)
	Rated impulse withstand voltage(1.2/50) U_{imp}	V	6000
	Dielectric test voltage at ind. Freq. for 1 min	kV	1.89
	Pollution degree		3
	Power loss	Rated current(A)	Average power loss per pole
		80A	7W
		100A	8.5W
		125A	10W
Mechanical features	Thermo-magnetic release characteristic		8-12In
	Electrical life		6,000 ($I_n=63A, 80A, 100A$) 4,000 ($I_n=125A$)
	Mechanical life		2,0000
	Contact position indicator		Yes
	Protection degree		IP20
	Reference temperature for setting of thermal element	°C	50
	Operating temperature	°C	-35...+70
	Terminal connection type		Cable/Pin-type busbar
	Terminal size top/bottom for cable	mm ²	16~50
		AWG	6-1/0
Installation	Terminal size top/bottom for busbar	mm ²	16~35
		AWG	6-2
	Tightening torque	N·m	3.5
		In-lbs.	31
	Mounting		On DIN rail EN 60715 (35mm) by means of fast clip device
	Connection		From top and bottom
Combination with accessories	Auxiliary contact		Yes

2.3 Temperature derating

The maximum permissible current in a circuit breaker depends on the ambient temperature where the circuit breaker is placed. Ambient temperature is the temperature inside the enclosure or switchboard in which the circuit breakers are installed.

The reference temperature is 50°C.

Rated current In (A)	Temperature compensation coefficient under various operational temperature										
	-35°C	-20°C	-10°C	0°C	10°C	20°C	30°C	40°C	50°C	60°C	70°C
63	1.715	1.618	1.545	1.473	1.394	1.303	1.212	1.109	1.000	0.891	0.806
80	1.668	1.573	1.502	1.426	1.343	1.266	1.183	1.094	1.000	0.893	0.810
100	1.675	1.581	1.510	1.433	1.344	1.273	1.184	1.095	1.000	0.894	0.811
125	1.617	1.524	1.454	1.384	1.308	1.256	1.163	1.082	1.000	0.907	0.826

3. Overall and mounting dimensions (mm)

